



Disassembling Motorola Defy XT

Remind you how to disassemble the mobile for clean and assemble it without break the phone in few steps

Written By: Wing Nga PANG





TOOLS:

- [Screw Driver](#) (1)

Flower head

Step 1 — Display



- Switch off the mobile.

Step 2



- Unlock the back case before open.

Step 3



- Remove the battery
- Remove the memory card
- Remove the Sim card

Step 4





- Remove 6 screws
- Tear off a part of label
- Release the usb cover

Step 5



- Open the green case part by your fingernail from left side to the right side with the usb socket
- Be care of your labels
- If you want to repair the SIM card slot legs, be sure no short circuits in 6 legs.

Step 6

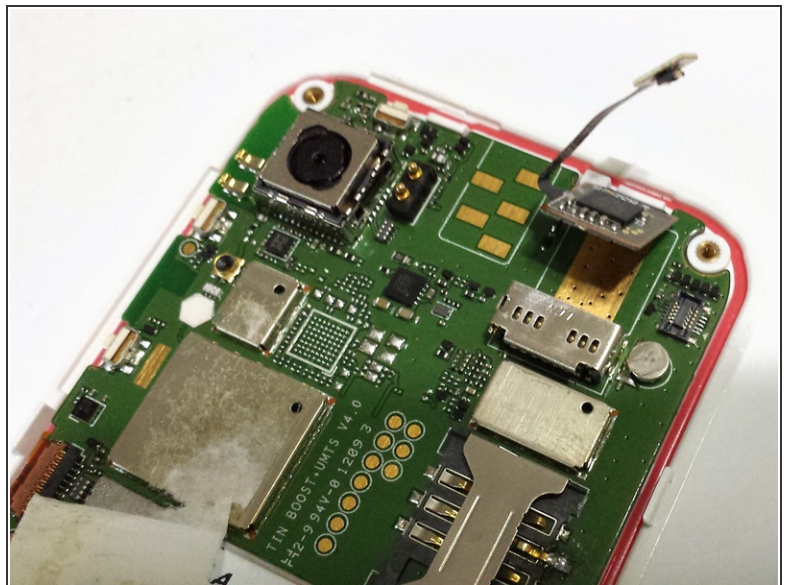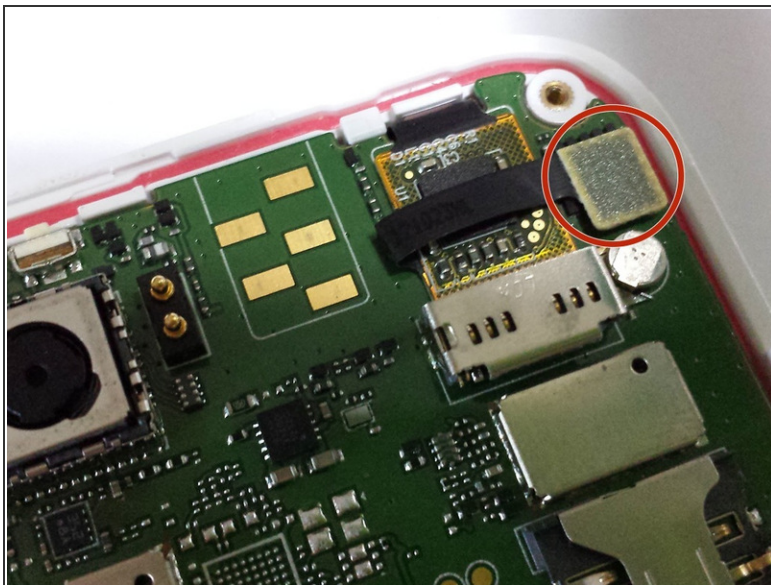


- To release the PCB for cleaning the Display the the touch screen, remove 2 PARTS by fingernail.
- 1. Touchscreen adapter
- 2. Sticker between the touchscreen PCB & mobile PCB
- Remove the mobile PCB much careful form top right. Be care the touchscreen circuits.

Step 7



- You can use a cloth, USB vacuum cleaner (be careful of the components in the green case), and adhesive tape to remove all the dust.
- That finger pin is left by the Motorola Support Center in Hong Kong!!
- You can also clean the camera lens on PCB

Step 8

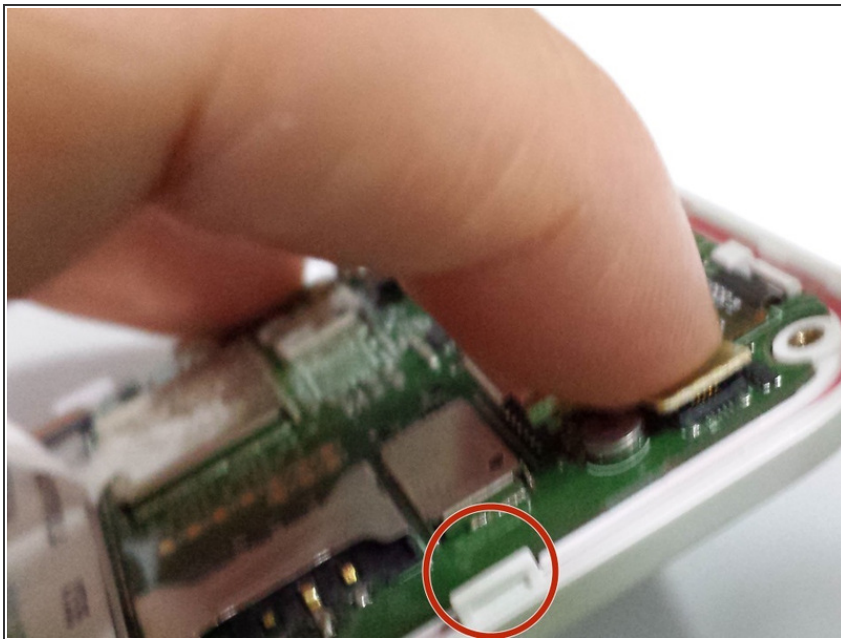

- Remember to put all parts back and insert the touchscreen plugs slightly.
- Put the green case back, make sure all locks is conneted

Step 9



- You can test the mobile before screw.
- After insert the memory card, SIM card and battery, switch on the phone
- Test call in and call out, also check the speaker
- Open the map Apps to test Wifi and GPS
- Bluetooth file transfer
- Camera test and save in sd card
- Check the sd card files
- Try to connect with PC

Step 10



- If all works, remove the SIM card and battery.
- Recheck the label is it on the top of the green case
- Screws up all 6 screws
- Put back all battery and SIM card
- Close the back case and lock it
- Close the USB cover
- Done

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-08-05 06:00:42 AM.